


Technical specification sheet

HAC 50 H 15 | Aluminium Cylinder

Specifications		
article number		100.122.097
short description		Aluminium Cylinder
model		HAC 50 H 15
max. working pressure	bar/Mpa	720 / 72
tonnage	t	50
stroke	mm	150
closed height	mm	301
capacity	kN/t	510.4 / 52
effective pressure area (press)	cm ²	70.9
effective pressure area (retract)	cm ²	32.4
required oil content (effective)	cc	577
required oil content (press)	cc	1063
required oil content (retract)	cc	486
connection		A 118
cylinder type		standard
acting type		double
return type		hydraulic
material		aluminium
weight, ready for use	kg	13.3
ASME		B30.1

Technical drawing dimensions		
dimension A	mm	301
dimension B	mm	145
dimension C	mm	70
dimension D1	mm	76
dimension D2	mm	76
dimension E	mm	28
dimension F	mm	293
dimension P	mm	72
l type		[l2]

Standard supplied with	
• High Flow female coupler A 118	
• Flat saddle	

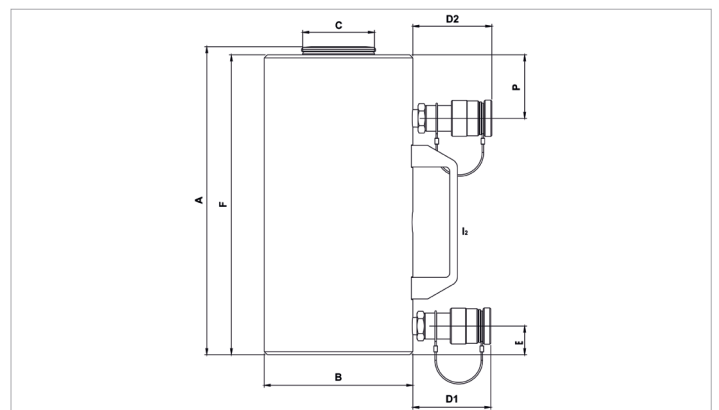

holmatro.com

© Holmatro 2021-09-11

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.