Technical specification sheet




HSC 20 S 5 | Short Stroke Cylinder

Specifications		
article number		100.112.301
short description		Short Stroke Cylinder
model		HSC 20 S 5
max. working pressure	bar/Mpa	720 / 72
tonnage	t	20
stroke	mm	50
closed height	mm	103
capacity	kN/t	203.6 / 20.8
effective pressure area	cm ²	28.3
required oil content (effective)	CC	141.4
connection		A 118
cylinder type		short stroke
acting type		single
return type		spring
material		steel
weight, ready for use	kg	5.5
ASME		B30.1

Harry Control of the	holmatro		
		9/	\ _/

Technical drawing dimensions				
dimension A	mm	103		
dimension B	mm	98		
dimension C	mm	50		
dimension D	mm	77		
dimension E	mm	15		
dimension F	mm	102		
angle A1	0	5		

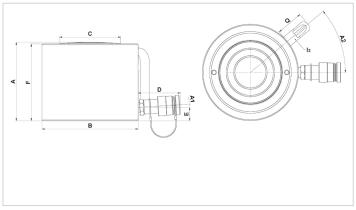

Standard supplied with

• High Flow female coupler A 118





holmatro.com

© Holmatro 2020-05-30

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.