


General information

PVS4420200513

The off center load cell C2Z1 is easy to assemble and guarantees high performance in terms of precision and resistance, especially to humidity. For this reason, it is usually used in scales for commercial use. The off-center cell C2Z1 has an excellent quality-price ratio as it has an advantageous price compared to its features.

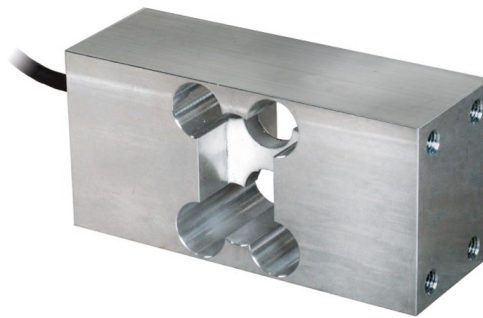

Suggested related products

A highly performing weighing system must be accurate, perfectly calibrated and well maintained. In order to improve the load cell performance and to optimize its functioning, you may need the following products:

Weight Transmitter [UWT 6008](#)

Weight Transmitter [DAT 1400](#)

Weight Indicator [MCT 1302](#)

Tester 1008 [TESTER 1008](#)

Junction Box [CGS4-C](#)

Off Center load cell [U2D1](#)


All indicated data may be changed without notice.
All the measures indicated are expressed in millimeters (mm).

Technical specifications

PVS4420200513

Rated load RL:	60, 120, 150, 300 Kg
Repeatability:	±0.02 % RO
Creep (20 minutes):	±0.025 % RO
Full scale non-Linearity:	0.02 % RO
Safe overload:	150 % RL
Ultimate overload:	250 % RL
Material:	Alluminum
Compensated Temperature:	-10 ÷ +50 °C
Temperature range:	-10 ÷ +70°C
Temperature effect on zero balance:	0.028 % PN/°C
Temperature effect on output:	0.011 % on output/°C
Rated output RO:	1.9 mV/V ±0.1
Zero balance:	±5 % RO
Insulation resistance:	<1000 Ohm
Input resistance:	400 ± 20 Ohm
Output resistance:	350 ±5 Ohm
Recommended input:	12 V
Maximum supply voltage:	20 V
Weight:	1 kg
Cable Length:	0,5 m
Hysteresis:	0.02 % RO

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).

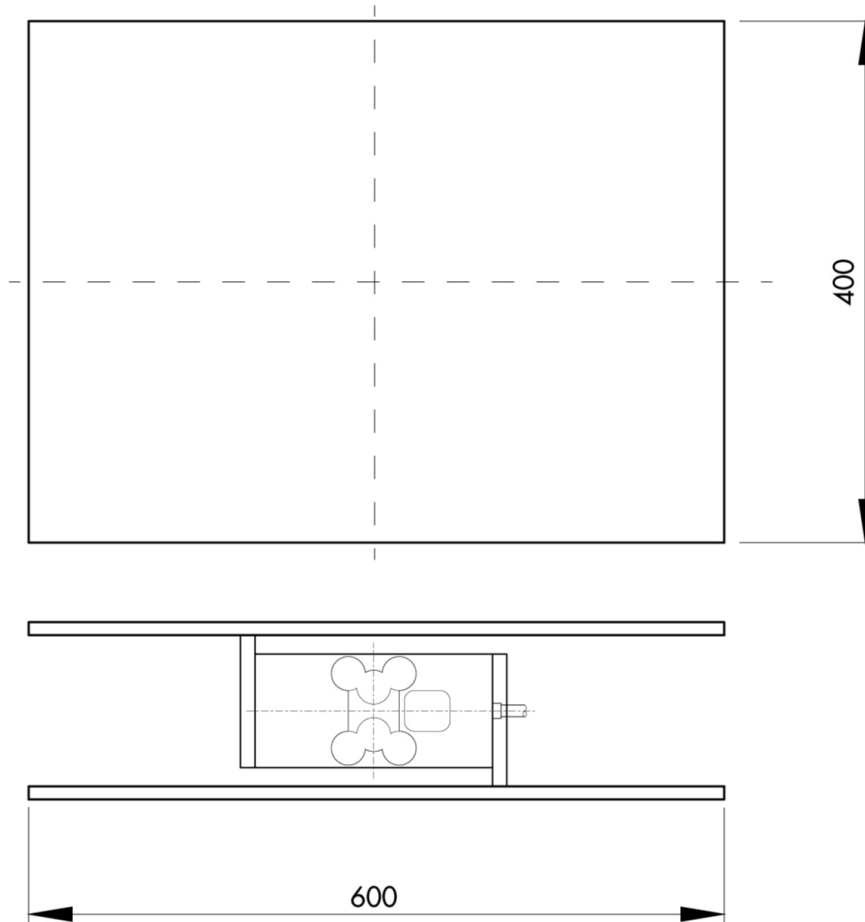

Electrical Connection

+Excitation	Red
-Excitation	White
+Signal	Green
-Signal	Blue
Shield	Cable shield

To Know

Error is within 0.02% SN applied with 1/2 of capacity at the position of 150mm of eccentricity
 The center of loading plate and the center of the load cell should be the same position

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).

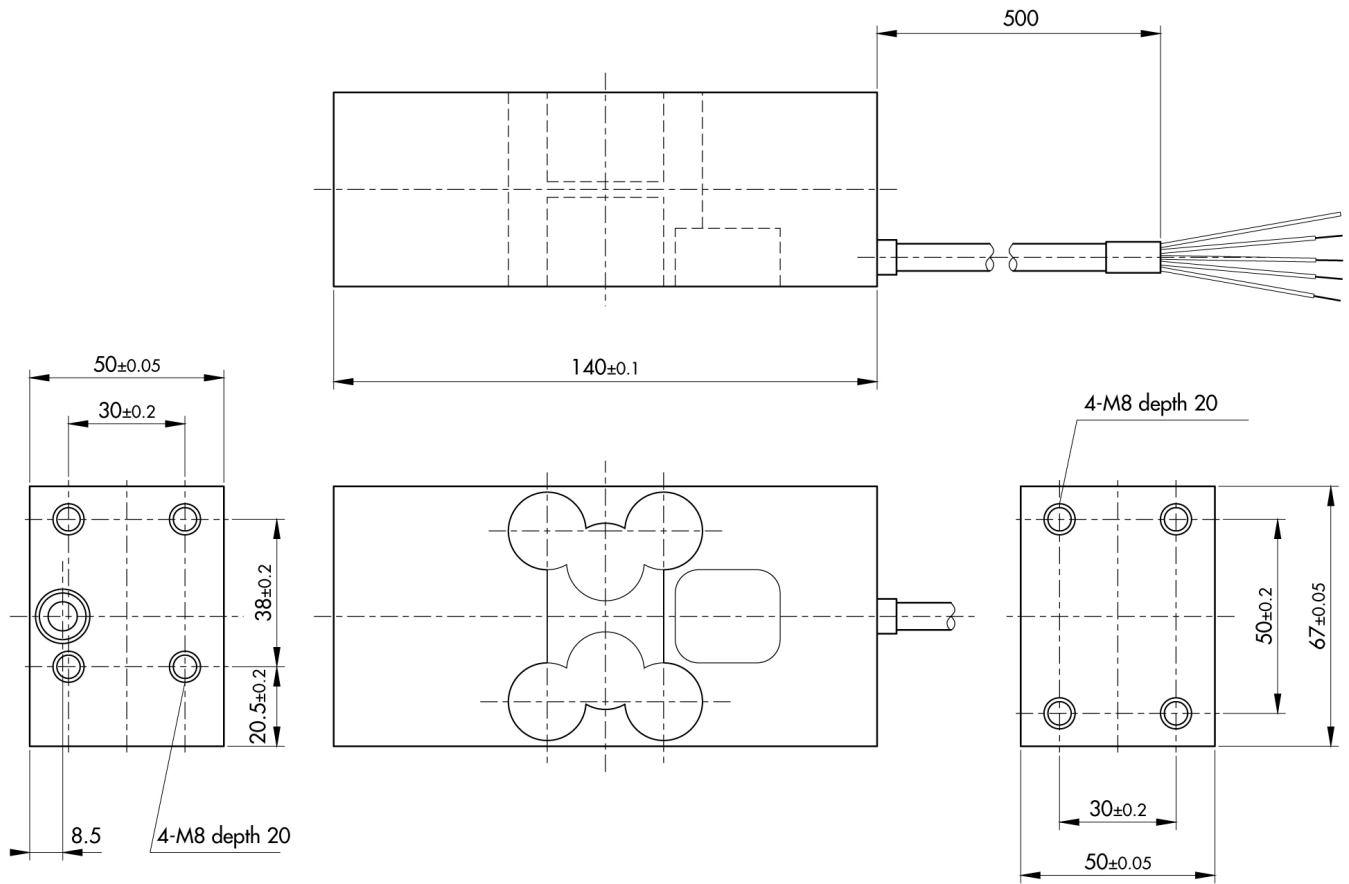

All indicated data may be changed without notice.
 All the measures indicated are expressed in millimeters (mm).