

Replacement Elements

60 - 11200 m³/h Flow Range

Features

- Pleated media for high dirt holding capacity
- Polyester: reinforced with epoxy coated steel wire on both sides of cloth, expanded metal I.D.
- Paper: heavy duty industrial strength paper surrounded by heavy gauge galvanized expanded metal
- 40 - 50% increased dust loading capacity with prefilter (part number suffix P)

Technical Specifications

- Polyester: 99+% removal efficiency to 5 micron
- Paper: 99+% removal efficiency to 2 micron
- Temp (continuous): min -26°C (-15°F), max 104°C (220°F)
- Filter change out differential: 37 - 50 mbar over initial ΔP

Polyester Media Benefits/Specs

- Less maintenance due to longer durability
- Moisture resistant
- Handles hot air and oil mist from unload cycle of reciprocating/piston compressor
- Washable with lukewarm water and mild detergent*

Paper Media Benefits/Specs

- Cost effective
- Gently blow out media*



Paper Elements




Polyester Elements

Rev: StdElmnt-EU0220N

60 - 11200 m³/h Flow Range

Endcap Information

- M = Molded plastisol
- B = Closed one end with bolt hole, open on other end
- G = Galvanized metal endcaps
- N = Neoprene blended gasket on open endcaps

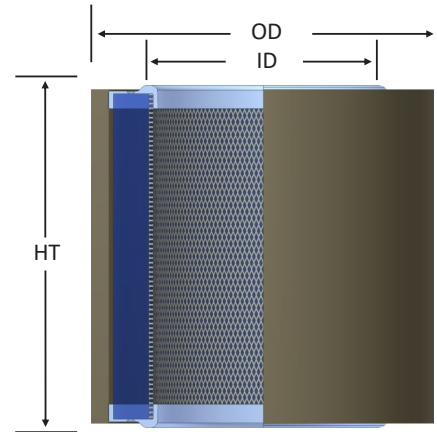

Replacement Elements up to 510 m³/h flow

Element Part Number		Element m ³ /h Rating	Surface Area m ²		Dimensions - mm			Std. Endcap Features
Polyester	Paper		Polyester	Paper	I.D.	O.D.	H.T.	
15P	14P	60	0.05	0.10	76	111	59	M
19P	18P	170	0.14	0.28	76	111	121	M
31P	30P	335	0.21	0.58	92	146	121	M
35P	34P	470	0.37	1.02	121	200	122	M
231P	230P	510	0.42	1.10	92	146	241	M

Note: Also available in wire mesh. Example part number for wire mesh: 230S
See Element Technical Data for maintenance guidelines.

Replacement Elements up to 11220 m³/h flow

Element Part Number		Element m ³ /h Rating	Surface Area m ²		Dimensions - mm			Std. Endcap Features
Polyester	Paper		Polyester	Paper	I.D.	O.D.	H.T.	
235P	234P	968	0.8	2.1	121	200	244	M
335P	334P	1360	1.1	3.2	121	200	368	M
237	236	935	0.8	2.1	119	197	216	GBN
239P	238P	968	1.2	4.5	123	234	267	GBN
2541	2540	1360	1.4	3.3	152	229	300	G
245P	244P	1500	1.3	3.3	152	248	244	GN M
345P	344P	1870	2.1	5.3	152	248	368	GN
275P	274P	1869	1.8	4.2	203	298	244	GN
375P	374P	2550	2.6	6.3	203	298	368	GN
377P	376P	3105	4.6	12	229	371	368	GN
385P	384P	5610	4.6	13	356	498	368	GN
485P	484P	8000	7.0	19	356	498	546	GN
685P	--	11220	9.3	--	356	498	724	GN

Note: Most are available in wire mesh. Example part number for wire mesh: 274S

Additional media available, contact factory or see Filter Media Specifications. See Element Technical Data for maintenance guidelines.

*Replacing element is recommended.



SOLBERG[®]

www.solbergmfg.com

All model offerings and design parameters are subject to change without prior notice.
Contact your representative or Solberg for the most current information.